


Model: MPCX-D2500-11COM
Intel Atom D2500 - Industrial Fanless PC, with 11 x COM
(7 x RS232 & 4 x RS232/485)



4 x RS232/485 (COM7 to COM10)
with Surge Protection

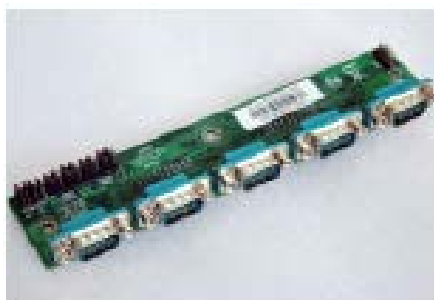

Directly HDD connection
No Internal Cabling



Screwing Type
Power Terminal

Application:

Factory Automation; Processor Automation; Intelligent Traffic Control; Medical Equipment; Marine/Offshore Industrial...

Specification	
Item	Description
Processor	Intel Atom D2500 (1.86GHz, Dual Core, 1MB Cache)
Chipset	Intel NM10
Memory	1 x DDRIII SO-DIMM Socket up to 4GB
Storage	Space for 1x 2.5" HDD/SSD, support MSATA
Audio	Realtek ALC662, 6 channel surround audio
LAN	2 x Realtek RTL8111E Gigabit LAN
USB port	6 x USB 2.0
Graphic	Intel GMA 3600 Graphic Engine, with VGA/DVI output
Expansive interface	1 x Mini PCI-E (support WIFI & 3G card)
I/O port	2 x RJ45; 6 x USB 2.0; 1 x VGA; 1 x DVI; 1 x Lin-in / Lin-out; 7 x RS232; 4 x RS232/485 (COM7 to COM10); 1 x Power Switch; 1 x DC input terminal
Power Supply (12VDC)	AC adapter (Input: 100~240VAC, 50/60Hz; Output: DC 12V/ 5A)

Construction	Heavy duty steel and aluminum (Fanless Design)
Watchdog Timer	1 - 255 second programmable
Environment	Operating temperature: -20 °C to 60 °C Storage temperature: -40 °C to 80 °C Storage humidity: 10% to 90% non-condensing Vibration: 17 to 500HZ 1G PTP; Shock: 1G /peak (11m sec)
Safety	CE/FCC/ROHS
Dimension W x H x D (mm)	235 x 151 x 61

Structure Diagram

