



Model: DS-32PCT  
32" Digital Signage with PCT Touch

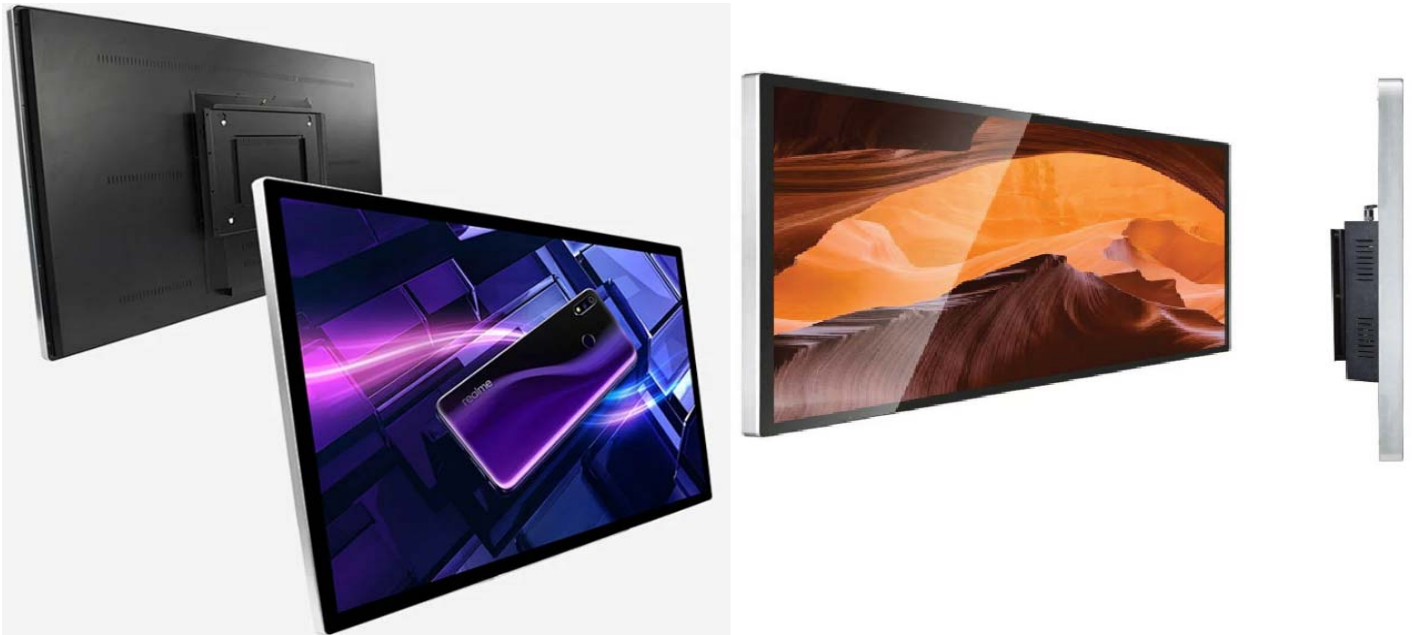

## Features:

- Full HD (1920 x 1080) LED Panel with PTC Touch for good multimedia experience.
- Made of tempered glass, providing panel protection and enhances vivid graphics.
- All metal housing ensures a long life and protects sign from scratches.

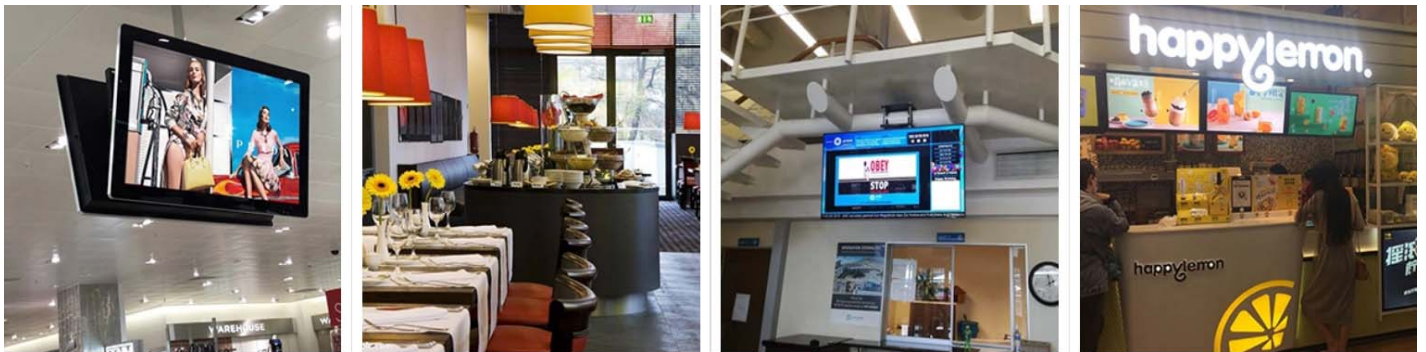

Specification		
Model	DS-32PCT	
Panel Parameter	Panel Size	32"
	Max. Brightness	400 nits
	Max. Resolution	1920 x 1080 (Optional for 4K UHD)
	Contrast Ratio	4000:1
	Panel Life	50000 hours
	Responsive Time	7ms
	Viewing Angle	H178/V178

Power Supply	AC 110V-240V, 50HZ/60HZ	
Touch Screen	Internal USB interface controller - Projected Capacitive Multi Touch (10 points) Light transmission: 85% or more Surface hardness : 7H Operation system : DOS; Windows XP / 7 / 8.1 / 10 / 11; Linux	
Applications	Airport, Supermarket, Hotel, Shopping Mall, Advertising... etc.	
Certificate Approval	CE, RoHS, FCC	
Dimension / GW	753 x 447 x 48mm / 13Kg	
Feature	Temperature	Storage: -20 Celsius degree to 60 Celsius degree
		Working: -10 Celsius degree to 50 Celsius degree
	Fixing Method	Wall mount
<b>Signage Solutions :</b>		
Androids Version	RK3568 (Quad-Core ARM Cortex-A55 up to 2.0GHz), 4GB RAM, 32GB SSD, with Bluetooth, WIFI, LAN, Android 11 <b>(Factory Default Supply)</b>	
	RK339 (Dual Cortex-A72 + Quad Cortex-A53, 64-bit CPU), 4GB RAM, 32GB SSD, with Bluetooth, WIFI, LAN, Android 10 <b>(Optional Upgrade)</b>	
Windows Version <b>(Optional Upgrade)</b>	<b><u>i3 CPU, 4G RAM, 128G SSD, integrated GPU, Wi-Fi, Win 10 Pro. 64 bit</u></b> Intel i3 6100U, I/O: HDMI+VGA+2*USB3.0+2*USB2.0+LAN+2*AUDIO	
	<b><u>i5 CPU, 8G RAM, 128G SSD, integrated GPU, Wi-Fi, Win 10 Pro. 64 bit</u></b> Intel i5 6200U, I/O: HDMI+VGA+2*USB3.0+2*USB2.0+LAN+2*AUDIO	
	<b><u>i7 cpu, 8G RAM, 256G SSD, integrated GPU, Wi-Fi, Win 10 Pro. 64 bit</u></b> Intel i7 8550U, I/O: HDMI+VGA+2*USB3.0+2*USB2.0+LAN+2*AUDIO	